

Artmark Products Corporation

<http://www.artmark.com>

APC FITTINGS

Distributed by:



11315 NW 36 TER Doral, Fl 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

APC Fittings

Connectors & Couplings



APC Liquid Tight Flexible Conduit




APC Outlet Boxes & Covers



APC Steel Flexible Conduit



APC Strut Channels & Clamps



APC Hanger, Locknuts, & Straps



APC Weather Proof Products





APC Fittings

EMT One (1) Hole Straps


Applications:

EMT of one-hole Straps are used to secure the EMT pipe to a wall or structure.

Available Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2".

Material: Steel
Finished: Zinc Plated

APC EMT Straps can be installed where UL listed product is required.

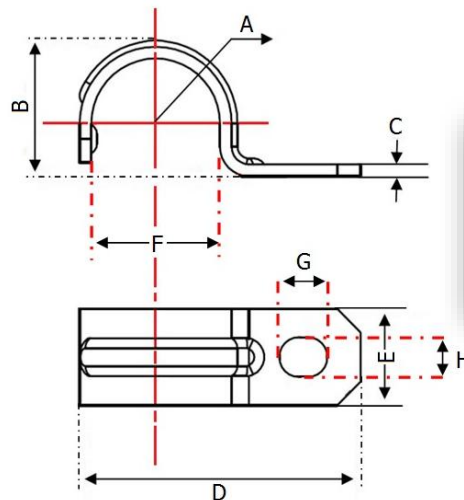

LISTED
E336628

EMT Straps One Hole

ARTMARK EMT STRAPS Cat. No.	Size	Std. Ctn.	Carton weight (Lbs.)	A ±.51mm ±.02"		B ±.51mm ±.02"		C ±.13mm ±.005"		D ±.51mm ±.02"		E ±.20mm ±.008"		F ±.51mm ±.02"		G ±.2mm ±.008"		H ±.2mm ±.008"	
				mm	"	mm	"	mm	"	mm	"	mm	"	mm	"	mm	"	mm	"
ARTEMT1H050UL	1/2"	1000	24	17.9	.706	16.5	0.65	1.19	0.047	41.5	1.634	14.8	0.583	17.9	.706	8	0.315	6.5	0.256
ARTEMT1H075UL	3/4"	1000	32	23.4	0.922	22.2	0.874	1.6	0.063	49.8	1.961	16	0.63	23.4	0.922	8	0.315	6.6	0.26
ARTEMT1H100UL	1"	500	24	29.5	1.163	27.5	1.083	1.6	0.063	58.2	2.291	19.3	0.76	29.5	1.163	8.5	0.335	8.5	0.335
ARTEMT1H125UL	1 1/4"	250	18	38.4	1.512	34.6	1.362	1.9	0.075	71.3	2.807	22.6	0.89	38.4	1.512	9.5	0.374	9.5	0.374
ARTEMT1H150UL	1 1/2"	100	10	44.2	1.74	41.5	1.634	2.5	0.098	79.4	3.126	25.5	1.004	44.2	1.74	9.5	0.374	9.5	0.374
ARTEMT1H200UL	2"	100	18	55.8	2.197	50.4	1.984	2.5	0.098	100	3.937	28.8	1.134	55.8	2.197	11	0.433	11	0.433

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Fittings

Rigid & IMC One (1) Hole Straps




Applications:

One hole Rigid & IMC Straps used to attach the pipe to a wall or structure.

Available Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 3" Y 4".

Material: Steel
Finished: Zinc Plated

APC Rigid & IMC Straps can be installed where UL listed product is required.

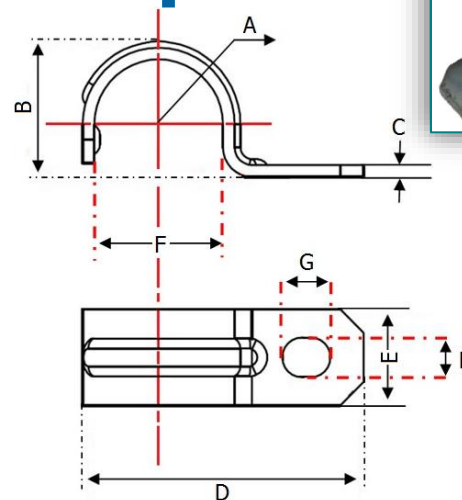

UL
LISTED
E336628

ARTMARK Rigid STRAPS Cat. No.	Size	Std. Ctn.	Wght. per Carton (Lbs.)	A ±.51mm ±.02"		B ±.51mm ±.02"		C ±.13mm ±.005"		D ±.51mm ±.02"		E ±.20mm ±.008"		F ±.51mm ±.02"		G ±0.2mm ±.008"		H ±0.2mm ±.008"	
				mm	"	mm	"	mm	"	mm	"	mm	"	mm	"	mm	"	mm	"
ARTRIG1H050UL	1/2"	500	16	21.3	0.84	20.6	0.811	1.8	0.071	47.3	1.862	16.2	0.638	21.3	0.84	8.5	0.335	6.9	0.272
ARTRIG1H075UL	3/4"	500	27	26.7	1.05	25	0.984	1.8	0.071	57	2.244	19.3	0.76	26.7	1.05	8.5	0.335	6.9	0.272
ARTRIG1H100UL	1"	250	20	33.4	1.315	30.8	1.213	1.8	0.071	66.2	2.606	22.4	0.882	33.4	1.315	9.5	0.374	9.5	0.374
ARTRIG1H125UL	1 1/4"	200	21	42.2	1.66	39.8	1.567	2.5	0.098	76.6	3.016	22	0.866	42.2	1.66	9.5	0.374	9.5	0.374
ARTRIG1H150UL	1 1/2"	200	28	48.3	1.9	48.3	1.902	2.5	0.098	92.8	3.654	25.6	1.008	48.3	1.9	9.5	0.374	9.5	0.374
ARTRIG1H200UL	2"	100	22	60.3	2.375	55	2.165	2.9	0.114	105.7	4.161	29.8	1.173	60.3	2.375	14	0.551	14	0.551
ARTRIG1H250UL	2 1/2"	50	20	73	2.875	66	2.598	3.8	0.148	126	4.961	30.2	1.189	73	2.875	14	0.551	14	0.551
ARTRIG1H300UL	3"	25	12	88.9	3.5	76.8	3.024	3.4	0.134	136	5.354	29.8	1.173	88.9	3.5	14	0.551	14	0.551
ARTRIG1H400UL	4"	25	17	114.3	4.5	101.5	3.996	4.5	0.177	182.8	7.197	29.5	1.161	114.3	4.5	14.3	0.563	14.3	0.563

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

R
I
G
I
D

S
t
r
a
p
s

O
n
e

H
o
l
e



APC Fittings

EMT Two (2) Holes Straps




Applications:

EMT of two holes straps are used to secure the EMT pipe to a wall or structure.

Available Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2".

Safety Standard for accessories used for the support of ducts, pipes, and cables, UL 2239 CSA C22.2 No. 18.4-04

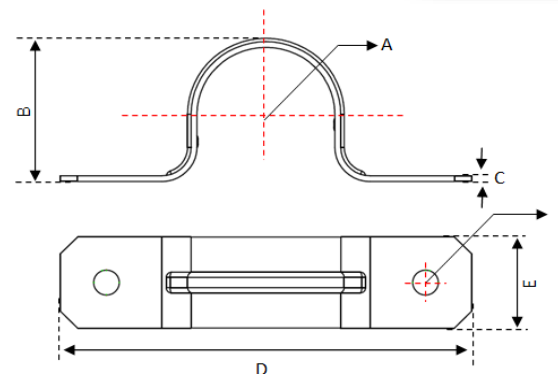

Material: Steel
Finished: Zinc Plated



LISTED
E336628

APC EMT Straps can be installed where UL listed product is required.

ARTMARK EMT Straps Cat. No.	Size	Std. Ctn.	Carton weight (Lbs.)	A ±.20mm ±.0079"		B ±.30mm ±.0118"		C ±.10mm ±.0039"		D ±.50mm ±.0197"		E ±.20mm ±.0079"		F ±.15mm ±.0059"	
				mm	"	mm	"	mm	"	mm	"	mm	"	mm	"
ARTEMT2H050UL	1/2"	1000	17.5	17.4	0.685	18.0	0.709	1.0	0.039	57.3	2.256	14.7	0.579	4.5	0.177
ARTEMT2H075UL	3/4"	500	10.0	23.4	0.921	25.2	0.992	1.0	0.039	68.8	2.709	16.2	0.638	4.5	0.177
ARTEMT2H100UL	1"	500	15.0	29.9	1.177	31.9	1.256	0.8	0.031	83.1	3.272	18.0	0.709	6.4	0.252
ARTEMT2H125UL	1 1/4"	100	5.0	38.4	1.512	36.7	1.445	1.0	0.039	95.5	3.760	19.1	0.752	6.5	0.256
ARTEMT2H150UL	1 1/2"	50	3.6	43.4	1.709	44.2	1.740	1.2	0.047	108.7	4.280	20.0	0.787	6.7	0.264
ARTEMT2H200UL	2"	20	2.45	56.0	2.205	54.8	2.157	1.5	0.059	123.4	4.858	25.5	1.004	9.4	0.370
ARTEMT2H250UL	2 1/2"	25	5.0	72.1	2.839	77.2	3.039	2.0	0.079	149.3	5.878	25.9	1.020	9.1	0.358
ARTEMT2H300UL	3"	25	5.9	87.8	3.457	91.8	3.614	2.0	0.079	173.8	6.843	25.6	1.008	9.2	0.362
ARTEMT2H400UL	4"	10	3.23	111.2	4.378	116.9	4.602	2.0	0.079	224.5	8.839	26.6	1.047	10.8	0.425

11315 NW 36 TER Doral, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

EMT Straps Two Holes



APC Fittings

Conduit Hangers


Applications:

Conduit hangers are used to attach/hang pipe to a wall, ceiling, structure, or strut channels from the bottom using bolts & nuts included.

Available Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" y 4".

Safety Standard for accessories used for the support of ducts, pipes, and cables, UL 2239
CSA C22.2 No. 18.4-04.

APC conduit hangers can be installed where UL listed product is required.

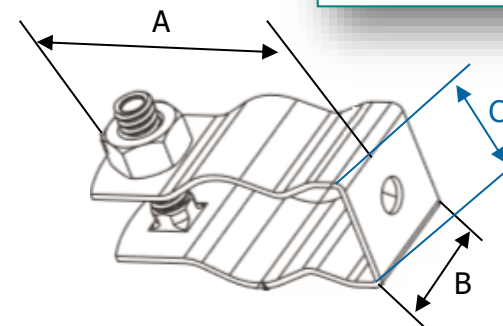

E336628

Conduit Hangers

ARTMARK Cat. No.	Size	Standard Carton	Carton Weight (Lbs)	A (mm)	B (mm)	C (mm)	A (in ")	B (in ")	C (in ")
ARTSHRIE050UL	1/2"	500	30	49.0	19.1	19.1	1.929	0.752	0.752
ARTSHRIE075UL	3/4"	50	3.5	57.9	22.5	24.0	2.28	0.886	0.945
ARTSHRIE100UL	1"	50	4	63.9	22.5	23.2	2.516	0.886	0.913
ARTSHRIE125UL	1-1/4"	50	5	76.8	22.5	26.7	3.024	0.886	1.051
ARTSHRIE150UL	1-1/2"	50	8	86.0	24.6	28.6	3.386	0.967	1.126
ARTSHRIE200UL	2"	25	11	107.0	30.1	35.2	4.213	1.185	1.386
ARTSHRIE250UL	2-1/2"	25	6.75	124.0	31.2	27.9	4.882	1.228	1.098
ARTSHRIE300UL	3"	25	8.50	134.0	31.2	31.6	5.276	1.228	1.244
ARTSHRIE400UL	4"	10	3.7	167.4	29.3	28.3	6.591	1.154	1.114


11315 NW 36 TER Doral, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Fittings

1-Hole BX Straps




LISTED
E336628

Applications:

One-hole BX straps are used to secure to flexible metal conduit to a wall or structure with screws.

Available Sizes: 3/8"

Safety Standard for accessories used for the support of flexible conduit, and cables, UL UL 514B.

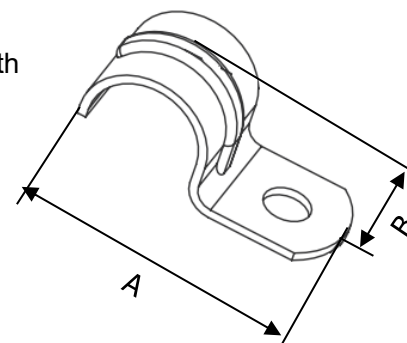

APC 1-Hole BX Straps can be installed where UL listed product is required.

ARTMARK Cat. No.	Size	Std. Ctn.	Carton Weight (Lbs)	A (in ")	B (in ")
ART1HBXSTRAP3/8	3/8"	2000	121	1.23	0.51

B
X

O
n
e

H
o
l
e

S
t
r
a
p



APC Fittings

Water Tight Hubs



LISTED


E328240

Applications:

Connectors from the ARTWTH series feature angled teeth, a reliable airtight seal, and are made of stamped zinc. They connect rigid metal conduits or IMC to a non-threaded opening in electrical cabinets with a NEMA 3R rated tightness.

Available sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" y 4".

Safety Standard for accessories used for the support of flexible conduit, and cables, UL UL 514B.

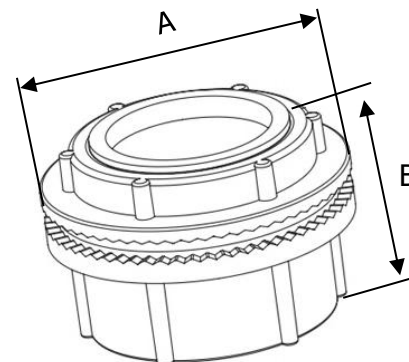

APC watertight HUB connector can be installed where UL listed product is required.

ARTMARK Cat. No.	Size	Std. Ctn.	Carton Weight (Lbs)	A (in. ")	B (in. ")
ARTWTH050UL	1/2"	250	41.3	1.406	1.406
ARTWTH075UL	3/4"	150	39.9	1.661	1.539
ARTWTH100UL	1"	100	35.4	1.949	1.752
ARTWTH125UL	1-1/4"	50	23.6	2.409	1.689
ARTWTH150UL	1-1/2"	40	25.7	2.693	1.713
ARTWTH200UL	2"	20	17.5	3.201	1.831
ARTWTH250UL	2-1/2"	5	7.2	3.685	2.594
ARTWTH300UL	3"	5	9.2	4.385	2.614
ARTWTH400UL	4"	5	121	5.437	2.559

11315 NW 36 TER Doral, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

W
a
t
e
r

T
i
g
h
t

H
u
b
s



APC Fittings

EMT Set Screw Connectors (Steel)




Applications:

EMT set screw connectors are used to join EMT pipe to a junction box. Connectors include three drive screws Robertson /Star/ slot.

•One screw from 1/2", 3/4", 1". Two screws 1 1/4" - 4".

Available in sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4".

UL Standard 514B CSA C22.2 NO. 18.3-04

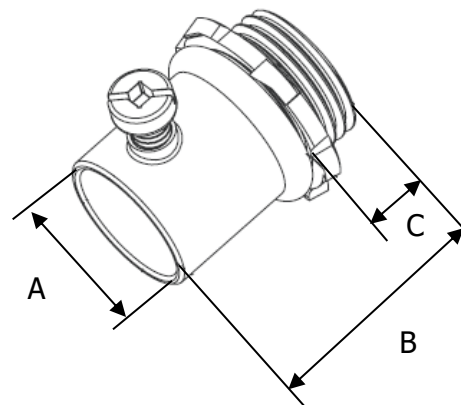

LISTED
E328240
E328241

APC EMT Set Screws connectors can be installed where UL listed product is required.

ARTMARK Cat. No.	Size	Standard Carton	Carton Weight (Lbs)	A (mm)	B (mm)	C (mm)	A (in ")	B (in ")	C (in ")
ARTEMTSSCONN050STL	1/2"	400	31	21.54	33.38	10.34	0.848	1.314	0.407
ARTEMTSSCONN075STL	3/4"	250	29	26.85	37.29	10.59	1.057	1.468	0.417
ARTEMTSSCONN100STL	1"	150	28	33.99	42.80	12.50	1.338	1.685	0.492
ARTEMTSSCONN125STL	1-1/4"	25	8	42.88	53.49	14.58	1.688	2.106	0.574
ARTEMTSSCONN150STL	1-1/2"	25	9	49.00	57.99	16.08	1.929	2.283	0.633
ARTEMTSSCONN200STL	2"	20	10	60.48	65.99	18.29	2.381	2.598	0.72
ARTEMTSSCONN250STL	2-1/2"	12	16	80.3	83.8	18.3	3.161	3.299	0.72
ARTEMTSSCONN300STL	3"	12	20	96.2	96.0	22.6	3.787	3.779	0.889
ARTEMTSSCONN400STL	4"	6	15	122.0	102.6	22.6	4.803	4.039	0.889

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

EMT
S
C
o
n
n
e
c
t
o
r
s



Uniones EMT Tipo Tornillo (Acero)




Applications:

EMT set screw couplings are used to join EMT pipe to a junction box. Connectors include three drive screws Robertson /Star/ slot.

•Available in sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4".

UL Standard 514B CSA C22.2 NO. 18.3-04

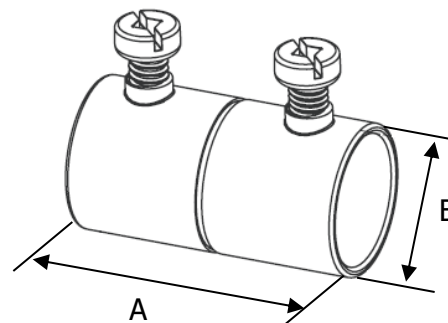

LISTED
E328240
E328241

APC EMT Set Screw couplings can be installed where UL listed product is required.

ARTMARK Cat. No.	Size	Standard Carton	Weight/ Carton (Lbs)	A (mm)	B (mm)	A (")	B (")
ARTEMSSCOUP050STL	1/2"	400	30	40.2	21.5	1.582	0.848
ARTEMSSCOUP075STL	3/4"	200	23	46.0	26.8	1.811	1.057
ARTEMSSCOUP100STL	1"	120	22	52.0	34.0	2.047	1.338
ARTEMSSCOUP125STL	1-1/4"	25	9	69.2	42.9	2.724	1.688
ARTEMSSCOUP150STL	1-1/2"	25	11	76.4	49.0	3.007	1.929
ARTEMSSCOUP200STL	2"	20	18*	82.5	60.5	3.248	2.381
ARTEMSSCOUP250STL	2-1/2"	12	20*	104.0	80.3	4.094	3.161
ARTEMSSCOUP300STL	3"	12	22	110.5	96.2	4.35	3.787
ARTEMSSCOUP400STL	4"	6	15*	120.0	122.0	4.724	4.803

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

EMT
SS
Couplings




EMT Compression Connectors Steel

Applications:

EMT Compression Connectors are used to link the EMT pipe to a junction box.

Available in Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2".

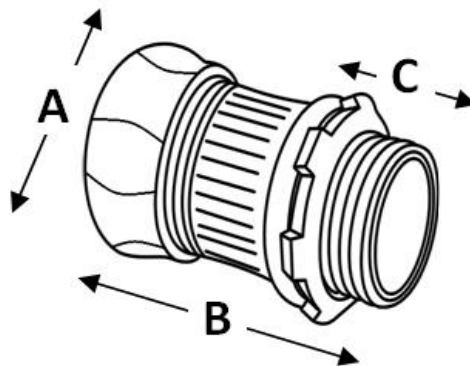

E328241

APC EMT compression connectors can be installed where UL listed product is required.

ARTMARK Cat. No.	Size	Standard Carton	Weight/ Carton (Lbs)	A (mm)	B (mm)	C (mm)	A (")	B (")	C (")
ARTEMTCMPCON050STL	1/2"	250	38.06	26.289	43.104	9.906	1.035	1.697	0.390
ARTEMTCMPCON075STL	3/4"	250	50.6	32.893	46.711	10.897	1.295	1.839	0.429
ARTEMTCMPCON100STL	1"	100	25.3	39.192	55.093	13.589	1.543	2.169	0.535
ARTEMTCMPCON125STL	1-1/4"	25	10.34	47.396	62.890	14.910	1.866	2.476	0.587
ARTEMTCMPCON150STL	1-1/2"	25	13.2	54.000	73.990	16.789	2.126	2.913	0.661
ARTEMTCMPCON200STL	2"	10	7.26	66.599	82.499	16.408	2.622	3.248	0.646

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

EMT
C
o
m
p
r
e
s
s
i
o
n

C
o
n
n
e
c
t
o
r
s




EMT Compression Couplings Steel

Applications:

EMT compression couplings are used to join two EMT pipes or an EMT pipe to an EMT elbow.

Available in sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2".

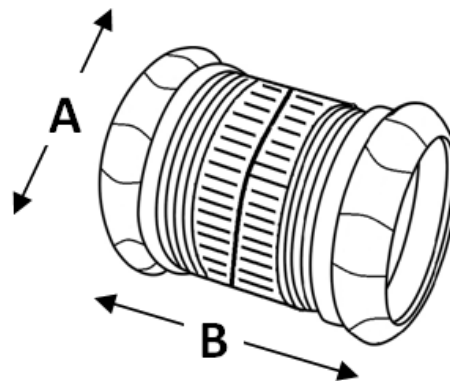

APC EMT compression connectors can be installed where UL listed product is required.

ARTMARK Cat. No.	Size	Standard Carton	Weight/ Carton (Lbs)	A (mm)	B (mm)	A (")	B (")
ARTEMTMPCPL050STL	1/2"	250	39.6	26.289	51.003	1.035	2.008
ARTEMTMPCPL075STL	3/4"	200	43.12	32.893	51.003	1.295	2.008
ARTEMTMPCPL100STL	1"	100	22.44	39.192	53.975	1.543	2.125
ARTEMTMPCPL125STL	1-1/4"	25	11.66	47.396	76.809	1.886	3.024
ARTEMTMPCPL150STL	1-1/2"	25	14.52	54.000	82.499	2.126	3.248
ARTEMTMPCPL200STL	2"	10	7.48	66.599	79.298	2.622	3.122

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Fittings


Straight Liquid Tight Connectors Zinc Die Cast

Applications:

Straight liquid tight connector are used for joining flexible LT conduit to a junction box at 0° angle (straight).

Available in sizes: 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4".

APC straight liquid tight connectors can be installed where UL listed product is required.



LISTED
E328240

ARTMARK Cat. No.	Size	Standard Carton	Carton weight (Lbs)	A (mm)	B (mm)	C (mm)	A (")	B (")	C (")
ARTLTSCONN038ZDC	3/8"	200	34.0	33.0	32.6	12.7	1.30	1.28	0.50
ARTLTSCONN050ZDC	1/2"	200	28.0	33.5	32.0	12.5	1.32	1.26	0.49
ARTLTSCONN075ZDC	3/4"	100	22.0	40.3	33.0	12.5	1.59	1.30	0.49
ARTLTSCONN100ZDC	1"	50	18.0	45.4	40.5	16.8	1.79	1.59	0.66
ARTLTSCONN125ZDC	1-1/4"	50	29.0	57.9	44.5	16.6	2.28	1.75	0.65
ARTLTSCONN150ZDC	1-1/2"	20	14.5	63.4	44.5	17.0	2.50	1.75	0.67
ARTLTSCONN200ZDC	2"	20	18.0	76.8	45.5	16.5	3.02	1.79	0.65
ARTLTSCONN250ZDC	2-1/2"	1	2.0	95.2	68.0	24.0	3.75	2.68	0.94
ARTLTSCONN300ZDC	3"	1	4.0	110.5	66.0	24.6	4.35	2.60	0.97
ARTLTSCONN400ZDC	4"	1	5.0	133.0	77.0	26.0	5.24	3.03	1.02

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

Liquid Tight Straight Connectors



APC Fittings

90° Liquid Tight Connectors


Zinc Die Cast

Applications:

Liquid tight connectors are used for joining flexible LT conduit to a junction box at a 90° angle.

Available in sizes: 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4".

APC 90° LT connectors can be installed where UL listed product is required.



LISTED
E328240

ARTMARK Cat. No.	Size	Standard Carton	Carton weight (Lbs)	A (mm)	B (mm)	C (mm)	A (")	B (")	C (")
ARTLT90CONN038ZDC	3/8"	100	23.0	55.0	57.0	12.00	2.17	2.24	0.47
ARTLT90CONN050ZDC	1/2"	100	18.0	55.0	57.0	12.00	2.17	2.24	0.47
ARTLT90CONN075ZDC	3/4"	100	28.2	61.5	64.0	12.00	2.42	2.52	0.47
ARTLT90CONN100ZDC	1"	50	23.0	71.2	83.0	17.00	2.80	3.27	0.67
ARTLT90CONN125ZDC	1-1/4"	20	21.0	83.0	95.0	20.00	3.27	3.74	0.79
ARTLT90CONN150ZDC	1-1/2"	20	21.0	94.0	100.0	17.00	3.70	3.94	0.67
ARTLT90CONN200ZDC	2"	10	17.0	107.0	115.0	15.00	4.21	4.53	0.59
ARTLT90CONN250ZDC	2-1/2"	1	3.0	135.0	147.0	25.00	5.31	5.79	0.98
ARTLT90CONN300ZDC	3"	1	4.0	154.0	165.0	22.00	6.06	6.50	0.87
ARTLT90CONN400ZDC	4"	1	7.0	175.0	197.0	23.50	6.89	7.76	0.93

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

L
i
q
u
i
d

T
i
g
h
t

9
0
°

C
o
n
n
e
c
t
o
r
s



APC Fittings

BX Straight Connectors



Zinc Die Cast

Applications:

Straight BX connectors are used to join BX flexible conduit to a junction box at 0° angle (straight). Connectors include three drive screws Robertson / Star / slot. Screw 1 ½" - 1". 2-screws 1 ¼" - 4".

Available in Sizes: 3/8", 1/2", 3/4", 1", 1 ¼", 1 ½", 2", 2 ½", 3" & 4".

APC straight BX connectors can be installed where UL listed product is required.



LISTED

E328238

ARTMARK Cat. No.	Size	Standard Carton	Carton weight (Lbs)	A (mm)	B (mm)	C (mm)	A (")	B (")	C (")
ARTBXSCONN038ZDC	3/8"	500	31	29.0	14.2	13.0	1.14	0.58-0.61	0.51
ARTBXSCONN050ZDC	1/2"	250	21	36.5	19.0	12.5	1.44	0.74-0.95	0.49
ARTBXSCONN075ZDC	3/4"	250	34	40.0	19.7	12.0	1.57	0.88-1.11	0.47
ARTBXSCONN100ZDC	1"	100	17	44.7	17.6	14.2	1.76	1.14-1.38	0.56
ARTBXSCONN125ZDC	1-1/4"	100	26	47.9	25.4	15.0	1.89	1.42-1.65	0.59
ARTBXSCONN150ZDC	1-1/2"	50	17	51.0	26.8	15.5	2.01	1.68-1.94	0.61
ARTBXSCONN200ZDC	2"	40	16	53.0	32.5	15.2	2.09	2.08-2.56	0.60
ARTBXSCONN250ZDC	2-1/2"	10	8	72.5	30.0	22.0	2.85	2.85-3.25	0.87
ARTBXSCONN300ZDC	3"	10	12	82.4	30.0	21.8	3.24	3.33-3.63	0.86
ARTBXSCONN400ZDC	4"	1	1	103.0	37.2	23.0	4.06	4.18-4.58	0.91

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988


<http://www.artmark.com>

B
X
S
t
r
a
i
g
h
t
C
o
n
n
e
c
t
o
r
s



APC Fittings

BX 90° Angle Connectors Zinc Die Cast



E328238

Applications:

BX connector are used to join BX flexible conduit to a junction box at a 90° angle. Connectors include three drive screws Robertson / Star / slot.
2-tornillo de 1/2" - 1". 4-tornillos 1 1/4"- 4

Available in Sizes: 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4".

APC 90° BX connectors can be installed where UL listed product is required.

ARTMARK Cat. No.	Size	Standard Carton	Carton weight (Lbs)	A (mm)	B (mm)	C (mm)	A (")	B (")	C (")
ARTBX90CONN038ZDC	3/8"	500	45	45.0	14.0	9.2	1.77	0.43-0.72	0.36
ARTBX90CONN050ZDC	1/2"	250	35	53.0	20.0	9.2	2.09	0.64-1.03	0.36
ARTBX90CONN075ZDC	3/4"	100	19	59.0	26.5	11.2	2.32	0.76-1.15	0.44
ARTBX90CONN100ZDC	1"	25	9	70.0	34.5	14.5	2.76	1.09-1.73	0.57
ARTBX90CONN125ZDC	1-1/4"	10	7	100.0	40.5	15.2	3.94	1.34-1.97	0.60
ARTBX90CONN150ZDC	1-1/2"	10	15	150.0	54.5	17.5	5.91	1.65-2.61	0.69
ARTBX90CONN200ZDC	2"	1	2	150.0	52.0	17.5	5.91	1.54-2.54	0.69
ARTBX90CONN250ZDC	2-1/2"	1	2	160.0	73.0	21.0	6.30	2.45-2.98	0.83
ARTBX90CONN300ZDC	3"	1	3	188.0	90.0	21.0	7.40	2.93-3.45	0.83
ARTBX90CONN400ZDC	4"	1	6	236.0	99.8	83.8	9.29	3.68-4.43	3.30

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

B
X
9
0
°
C
o
n
n
e
c
t
o
r
s





APC Fittings

Romex Connectors

Applications:

Romex connector used to secure connection of flexible cables or NM-B cable box. Connectors include three drive screws Robertson / Star / slot.

Available in Sizes: $\frac{3}{8}$ "- $\frac{1}{2}$ ", $\frac{3}{4}$ ", & 1".

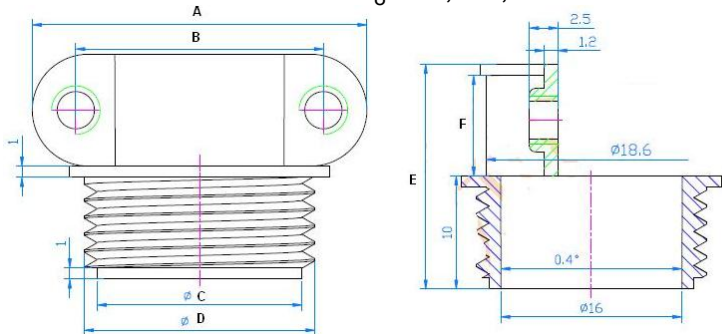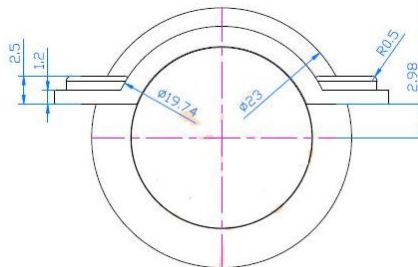

UL
LISTED
E328239

APC Romex connectors can be installed where UL listed product is required.

ARTMARK Cat. No.	Size	Standard Carton	Carton weight (Lbs)	A (mm)	B (mm)	Ø C (mm)	Ø D (mm)	E (mm)	F (mm)
ARTROMEXCONN038ZDC	$\frac{3}{8}$ "- $\frac{1}{2}$ "	1000	49	29.6	21.9	18.1	20.4	19.9	8.9
ARTROMEXCONN038ZDC	$\frac{3}{4}$ "	500	43.5	30.49	29.56	23.5	25.8	23.42	12.42

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

R
o
m
e
x

C
o
n
n
e
c
t
o
r
s




2" x 4" Handy Boxes

Applications:

Handy boxes are used to install electrical devices such as receptacles and switches in an electrical circuit.

Available with KO sizes: 1/2" & 3/4".

Safety standard for metallic outlet boxes, UL 514A C22.2 No. 18.1-13

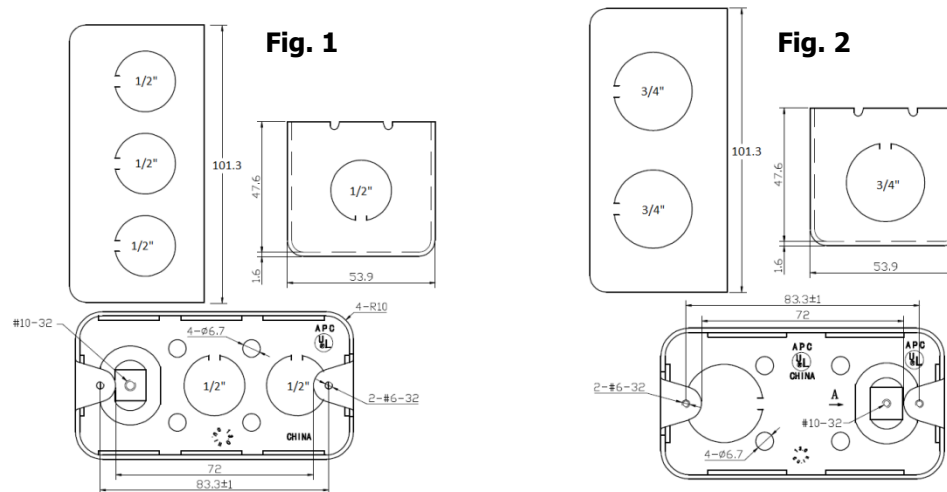

Material: Steel
Finished: Zinc Plated



E333220

APC Boxes can be installed where UL listed product is required.

ARTMARK Cat. No.	KO	Standard Carton	Carton weight (Lbs)	KO In the Sides	KO UP	KO Down	KO Back	Fig.
ART58HB361-50	1/2"	50	24	3 x 1/2"	1 x 1/2"	1 x 1/2"	2 x 1/2"	1
ART58HB361-75	3/4"	50	24	2 x 3/4"	1 x 3/4"	1 x 3/4"	1 x 3/4"	2

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

H
a
n
d
y

B
o
x
e
s




2" x 4" Handy Boxes

Applications:

Handy boxes are used to install electrical devices such as receptacles and switches in an electrical circuit.

Available KO $\frac{1}{2}$ " y $\frac{3}{4}$ " MKO Combination. Standard depth: $1\frac{7}{8}$ ".

Safety standard for metallic outlet boxes, UL 514A C22.2 No. 18.1-13

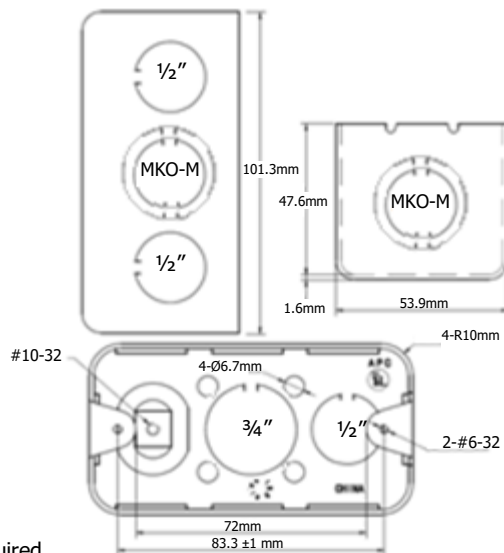

Material:
Terminado:
Espesor:

Acero
Galvanizado en Zinc
1.6mm

APC Boxes can be installed where UL listed product is required.



H
a
n
d
y

B
o
x
e
s

ARTMARK Cat. No.	KO	Standard Carton	Carton weight (Lbs)	KO In the Sides	KO UP	KO Down	KO Back
ART58HB361-MKO-M	$\frac{1}{2}$ " & $\frac{3}{4}$ " (MKO-M)	50	24	2 x $\frac{1}{2}$ " 1 x MKO-M	1 x MKO-M ($\frac{1}{2}$ & $\frac{3}{4}$) (moon)	1 x MKO-M ($\frac{1}{2}$ & $\frac{3}{4}$) (moon)	1 x $\frac{1}{2}$ " 1 x $\frac{3}{4}$ "

11315 NW 36 TER Doral, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Fittings

4" Square Metallic Boxes

Material: Steel
Finished: Zinc Plated



Applications:

4" square metallic boxes are used on the installation of electrical devices on an electric circuit.

Available with 1/2", 3/4", and combination 1/2" & 3/4" KO.

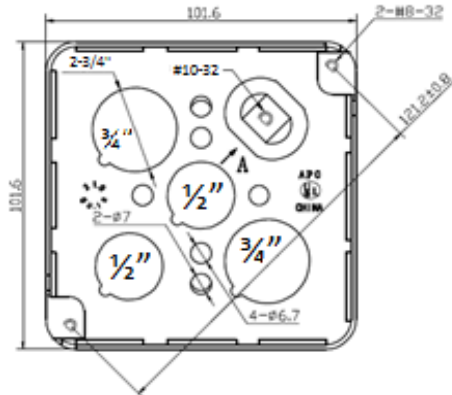
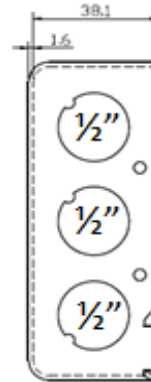


Fig. 1




Fig. 2

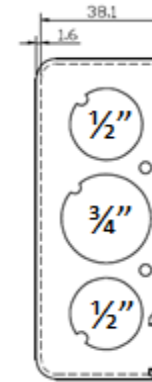



Fig. 3

UL
LISTED
E333220

S
q
u
a
r
e

B
o
x
e
s

APC Boxes can be installed where UL listed product is required.

ARTMARK Cat. No.	KO	Standard Carton	Carton weight (Lbs)	KO In the Sides	KO UP	KO Down	KO Depth	Fig.
ART52SQ451-50	1/2"	50	32	3 x 1/2"	3 x 1/2"	3 x 1/2"	4 x 1/2"	1
ART52SQ451-75	3/4"	50	32	2 x 3/4"	2 x 3/4"	2 x 3/4"	2x1/2" & 2x3/4"	2
ART52SQ451-50-75	1/2" & 3/4"	50	32	2x1/2" 1x3/4"	2x1/2" 1x3/4"	2x1/2" 1x3/4"	2x1/2" & 2x3/4"	3

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Fittings

4" Octagonal Metallic Boxes

Material: Steel
Finished: Zinc Plated


UL
LISTED
E333220







Applications:

Octagonal metal box are mainly used to install lighting fixtures and electrical device on an electric circuit.

Available with 1/2", 3/4", and combination 1/2" & 3/4" KO.

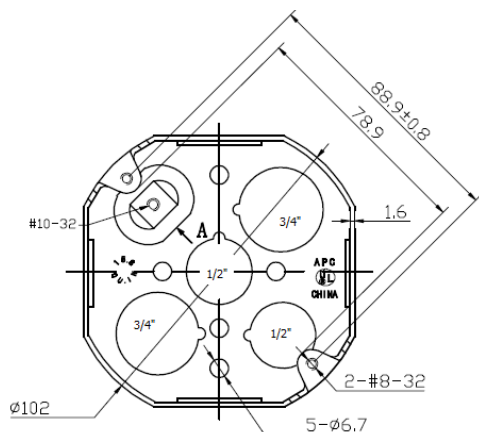

APC Boxes can be installed where UL listed product is required.

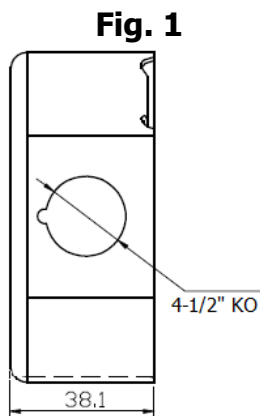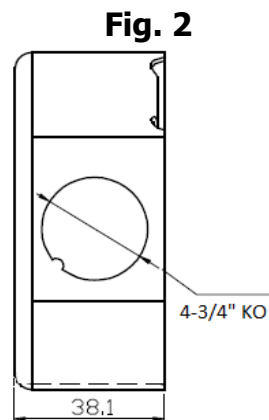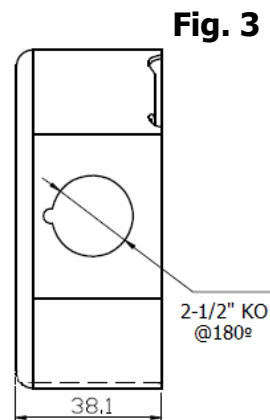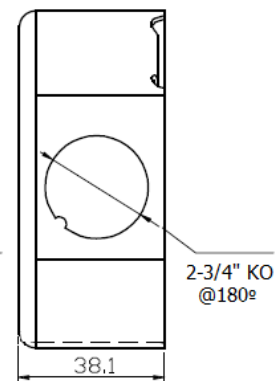

O
c
t
a
g
o
n
a
l

B
o
x
e
s

ARTMARK Cat. No.	KO	Standard Carton	Carton weight (Lbs)	KO In the Sides	KO UP	KO Down	KO Depth	Fig.
ART54OB451-50	1/2"	50	26	1 x 1/2"	1 x 1/2"	1 x 1/2"	2x1/2" & 2x3/4"	1
ART54OB451-75	3/4"	50	26	1 x 3/4"	1 x 3/4"	1 x 3/4"	2x1/2" & 2x3/4"	2
ART54OB451-50-75	1/2" & 3/4"	50	26	1 x 1/2" on each side 1 x 3/4" top & bottom			2x1/2" & 2x3/4"	3

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Fittings

4" Square Metal Covers

Specifications:

Square metal covers galvanized steel provide protection to a junction box.

Available: Blank and with 1/2" KO. To install 1 or 2 devices, 1/4" & 1/2" height



LISTED
E333220



Metallic Covers

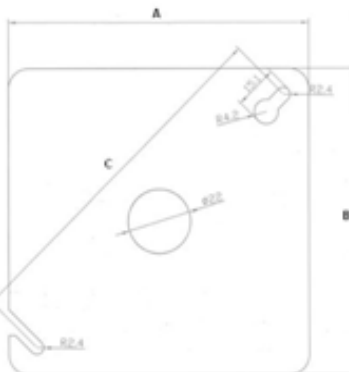


Fig. 1

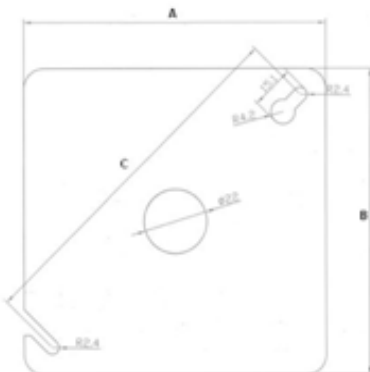


Fig. 2

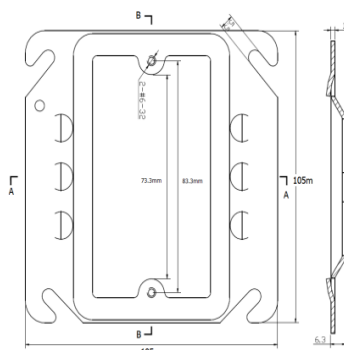


Fig. 3

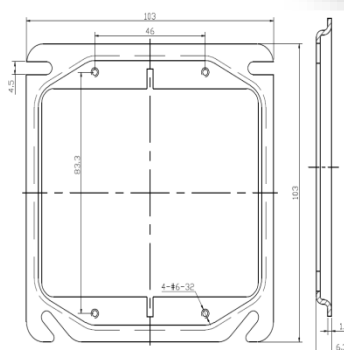


Fig. 4

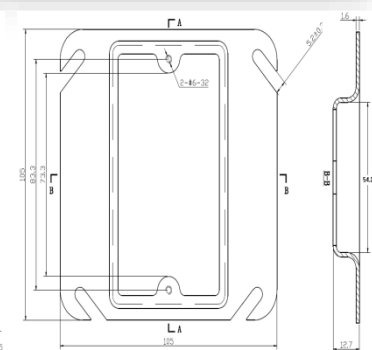


Fig. 5

APC covers can be installed where UL listed product is required.

ARTMARK Cat. No.	KO	Standard Carton	Carton weight (Lbs)	A & B (mm)	C (mm)	A & B (")	C (")	Fig.
ART52C1	None	100	30	105	122.4	4.13	4.82	1
ART52C6	1/2"	100	30	105	122.4	4.13	4.82	2
ART52C62	None	100	19	103	-	-	-	3
ART52C20	None	50	7	105	-	-	-	4
ART52C13	None	100	23	105	-	-	-	5

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Fittings

2"x4" Metallic Covers



Specifications:

Metallic covers 2" x 4", steel galvanized.

Available: Blank or 1/2" KO.

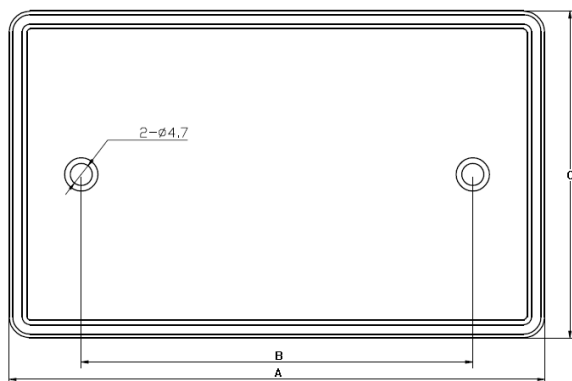


Fig. 1

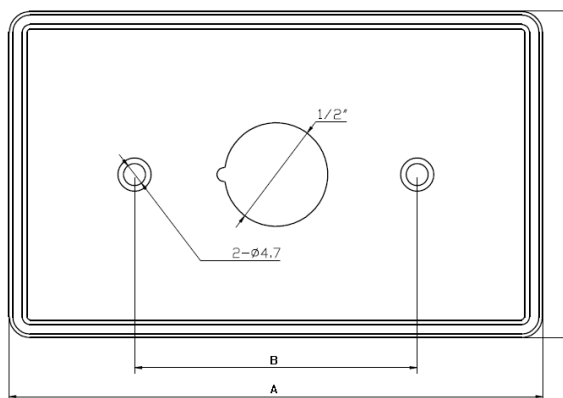


Fig. 2



LISTED
E333220

M
e
t
a
l
l
i
c

C
o
v
e
r
s

APC covers can be installed where UL listed product is required.

ARTMARK Cat. No.	KO	Standard Carton	Carton weight (Lbs)	A (mm)	B (mm)	C (mm)	A (In. ")	B (In. ")	C (In. ")	Fig.
ART58C1	None	100	10.5	114	83.3	69.6	4.5	3.3	2.74	1
ART58C6	1/2"	100	9.2	114	60.3	69.6	4.5	2.37	2.74	2

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Fittings

Strut Mounting Rail

Applications:

Each strut/rails or channels are used to facilitate the installation of electrical systems, pipes, fixtures; on a wall or any other type of structure.

Construction:

Made of carbon steel sheet according to ASTM A36, A575, A576, A635. Each rail is 10 feet long and comes with a hole semi-elongated.

Finish: Pre-Galvanized.

Available in other finishes: hot dipped galvanized and stainless steel (upon request).

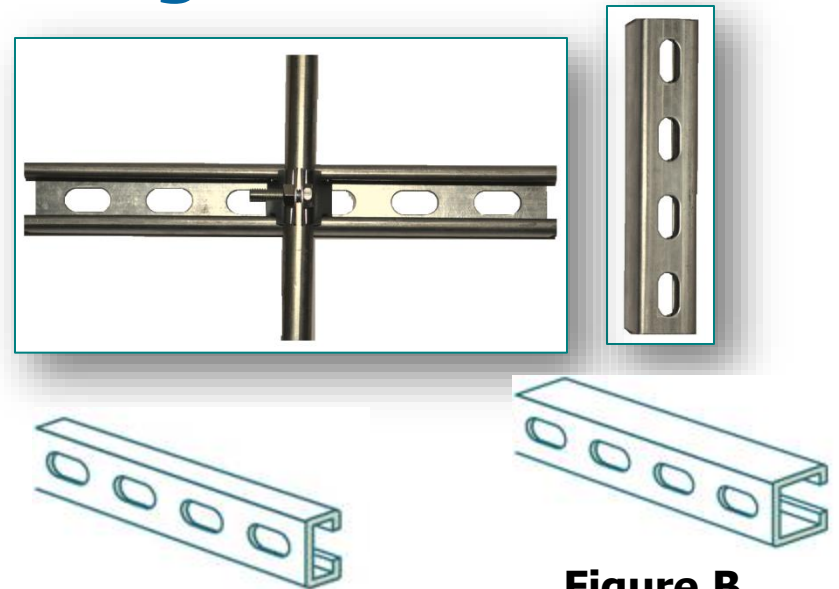


Figure A


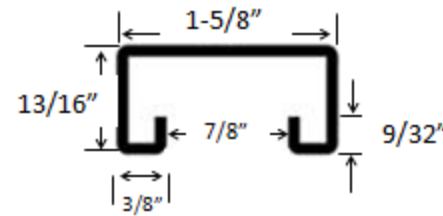


Figure B

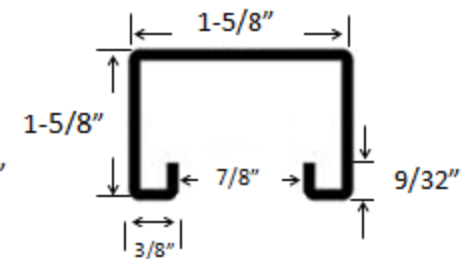

ARTMARK Cat. No.	Dimensions (")		Standard (Bundle)	Weight/ Bundle (Lbs)	Wall Thickness		Figure	Length (Feet)
	Width	Height			Ga	mm		
ARTSTCH1316X15814	1-5/8	13/16	100	968	14	2.0	A	10
ARTSTCH158X15814	1-5/8	1-5/8	50	710	14	2.0	B	10

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

S
t
r
u
t

C
h
a
n
n
e
l



APC Fittings

Strut Clamps



E336628

Construction:

Made of carbon steel sheet according to ASTM A36, A575, A576, A635. Each assembly consists of two pieces and includes a slot screw with hex nut.


Finish: **Electro-Galvanized.**

Applications:

Universal strut clamps two-pieces for industrial and commercial use in the installation and assembly of pipes EMT, IMC or Rigid on rails or strut channels.

Available sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4".

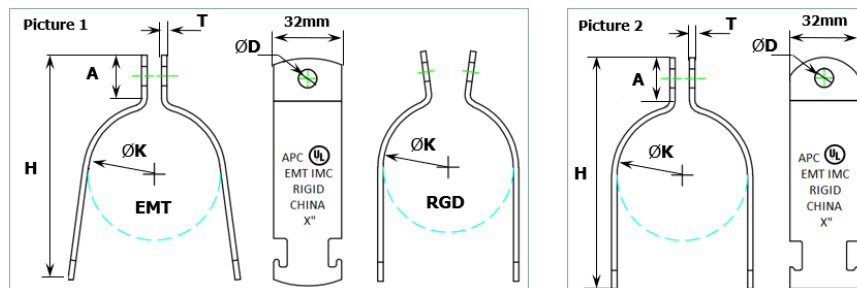

ARTMARK Cat. No.	Size		OD Pipe Diameter		A	H	T	ØD	Bolt Dim.	Load Capacity	Pic #
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(Lbs)	
ARTUSTCLMP050UL	1/2"	16	.70~.84	17.9~21.3	18	52.5	1.9	Ø7.2	1/4"x1 1/4"	395	1
ARTUSTCLMP075UL	3/4"	21	.92~1.03	23.4~26.7	18	60.5	1.9	Ø7.2	1/4"x1 1/4"	395	1
ARTUSTCLMP100UL	1"	27	1.16~1.31	29.5~33.4	18	65.5	1.9	Ø7.2	1/4"x1 1/4"	595	1
ARTUSTCLMP125UL	1 1/4"	35	1.51~1.66	38.4~42.2	18	78	1.9	Ø7.2	1/4"x1 1/4"	595	2
ARTUSTCLMP150UL	1 1/2"	41	1.74~1.90	44.2~48.3	21	88.5	2.3	Ø8.8	5/16"x1 1/2"	595	1
ARTUSTCLMP200UL	2"	53	2.2~2.37	55.8~60.3	21	101	2.3	Ø8.8	5/16"x1 1/2"	792	1
ARTUSTCLMP250UL	2 1/2"	63	2.87	73	21	113	2.3	Ø8.8	5/16"x1 3/4"	792	1
ARTUSTCLMP300UL	3"	78	3.5	88.9	25	137	2.3	Ø8.8	5/16"x1 3/4"	792	2
ARTUSTCLMP400UL	4"	103	4.5	114.3	25	163	2.3	Ø8.8	5/16"x1 3/4"	925	2

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

Strut Clamps



APC Fittings

BX Flexible Metallic Tubing

Applications:

For industrial and commercial use in circuit protection and internal wiring in dry areas. It is also suitable for the protection of electrical cables machinery, tools and equipment that do not require listed product and use them on not exposed to the weather areas.

Available in Sizes:

$\frac{3}{8}$ " , $\frac{1}{2}$ " , $\frac{3}{4}$ " , 1" , $1\frac{1}{4}$ " , $1\frac{1}{2}$ " , 2" , $2\frac{1}{2}$ " , 3" & 4" on coils and wooded reels.

Construction:

Internal flexible metal pipe corrosion resistant galvanized with a system interlock / square squarelock This tube is impact resistant and of high flexibility.



ARTMARK Cat. No.	Size	Standard Package (Ft)	Weight / Package Std. (Lbs)	Internal Diameter (mm)		External Diameter (mm)		Curving radius Minimum (mm)
				Min.	Max.	Min.	Max.	
ARTSFLXC038	3/8"	100	11	9.3	9.7	14.1	14.5	50
ARTSFLXC050	1/2"	100	17	16.4	16.9	21.6	22.0	76
ARTSFLXC075	3/4"	100	20	20.7	21.2	26.5	27.0	100
ARTSFLXC100	1"	100	25	26.0	26.5	32.5	33.0	125
ARTSFLXC125	1-1/4"	50	22	33.0	33.6	38.4	39.0	158
ARTSFLXC150	1-1/2"	50	24	37.6	38.2	46.4	47.0	180
ARTSFLXC200	2"	50	30	51.5	52.1	59.3	60.0	250
ARTSFLXC250	2-1/2"	25	23	63.5	64.5	74.0	75.0	320
ARTSFLXC300	3"	25	30	77.5	78.5	88.0	89.0	380
ARTSFLXC400	4"	25	39	103.5	104.8	113.0	114.5	500

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

B
X

S
t
e
e
l

F
l
e
x
i
b
l
e

C
o
n
d
u
i
t



APC Fittings

Metallic Liquid Tight Flexible Conduit

Applications:

For industrial and commercial use in the wiring circuit protection in extremely wet or damp areas. It is also suitable for the protection of electrical cables machinery, tools and equipment that do not require listed product. For internal and external use.

Available in Sizes:


3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4" on coils and wooden reels.

Construction:

Galvanized metal flexible pipe internal corrosion and sunlight resistant, with a system interlock / squarelock and a nylon cord in the middle of filling. PVC jacket is flexible, impact and flame resistant.

Working Temperature: -40 ° to 90 ° Celsius.

Standard Color: Grey

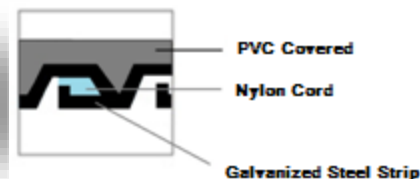

ARTMARK Cat. No.	Size	Standard Package (Ft)	Weight / Package Std. (Lbs)	Internal Diameter (mm)		External Diameter (mm)		Curving Radius (mm)
				Min.	Max.	Min.	Max.	
ARTMLTC038	3/8"	100	18	12.3	12.6	15.0	15.6	50
ARTMLTC050	1/2"	100	22	15.8	16.1	18.8	19.1	65
ARTMLTC075	3/4"	100	30	20.8	21.1	23.9	24.2	75
ARTMLTC100	1"	100	37	26.4	26.8	29.7	30.1	100
ARTMLTC125	1-1/4"	50	27	34.6	35.0	38.8	39.5	120
ARTMLTC150	1-1/2"	50	40	39.6	40.3	43.8	44.5	140
ARTMLTC200	2"	50	50	50.6	51.3	56.2	56.9	180
ARTMLTC250	2-1/2"	25	36	62.7	63.7	68.7	69.7	240
ARTMLTC300	3"	25	49	77.0	78.0	83.0	84.0	300
ARTMLTC400	4"	25	67	100.8	101.8	107.2	108.7	350

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

L
i
q
u
i
d

T
i
g
h
t

C
o
n
d
u
i
t



APC Fittings

Galvanized Rigid Threaded Couplings




Applications:

Galvanized threaded rigid couplings are used to connect/join two rigid/IMC conduit. These couplings can be used to connect liquid tight flexible conduit to a rigid/IMC, EMT conduit.

Available in Sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4".

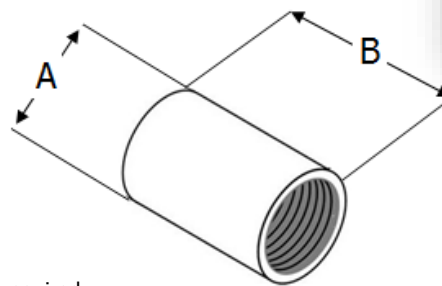

LISTED

E468259



APC threaded couplings can be installed where UL listed product is required.

ARTMARK Cat. No.	Size	Standard Ctn.	Weight per Ctn. (Lbs)	Nominal OD A		Length B		Thread per In ("")
				mm	in ("")	mm	in ("")	
ARTCOU050UL	1/2"	400	56	25.7	1.01	41.3	1.63	14
ARTCOU075UL	3/4"	300	60	31.8	1.25	41.7	1.64	14
ARTCOU100UL	1"	180	56	38.7	1.52	50	1.97	11.5
ARTCOU125UL	1-1/4"	100	39	47.5	1.87	51.6	2.03	11.5
ARTCOU150UL	1-1/2"	75	42	54.7	2.15	52.4	2.07	11.5
ARTCOU200UL	2"	60	44	67.3	2.65	54	2.13	11.5
ARTCOU250UL	2-1/2"	12	22	82.6	3.25	81	3.19	8
ARTCOU300UL	3"	8	18	98.3	3.87	84.1	3.31	8
ARTCOU400UL	4"	4	16	123.8	4.87	89.3	3.52	8

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

R
i
g
i
d

T
h
r
e
a
d
e
d

C
o
u
p
l
i
n
g
s



APC Fittings

Steel Locknut



Applications:


To secure to a junction box or metal enclosure the IMC, Rigid Conduit, or connectors

Available Sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4"

Construction:

Steel Plated

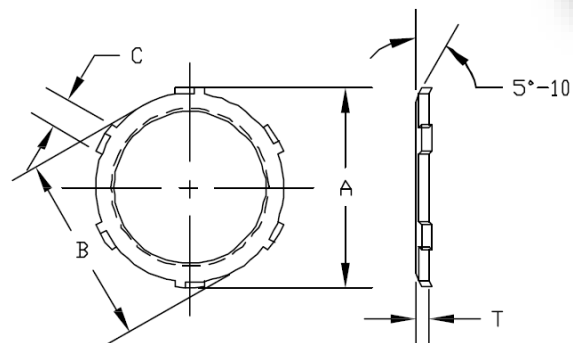

ARTMARK Cat. No.	Size	Standard Package	Weight / Std. Package (Lbs)	Pitch Diameter (mm)		Minor Diameter In (")		Diameter A ±.015 in (")	Diameter B ±.015 in (")	Ear C in (")	Thickness T ±.005 in (")
				Min.	Max.	Min.	Max.				
APC – 050	1/2"	500	5.1	0.787	0.797	0.755	0.775	1.130	1.000	.255-.265	.098
APC - 075	3/4"	100	1.44	0.999	1.009	0.965	0.985	1.390	1.255	.255-.265	.098
APC – 100	1"	50	1.38	1.250	1.260	1.213	1.233	1.705	1.566	.251-.261	.125
APC – 125	1-1/4"	100	3.47	1.595	1.605	1.558	1.578	2.065	1.900	.423-.433	.125
APC – 150	1-1/2"	50	2.15	1.837	1.847	1.800	1.820	2.360	2.170	.312-.322	.125
APC – 200	2"	50	2.95	2.307	2.317	2.270	2.290	2.860	2.680	.437-.447	.125
APC – 250	2-1/2"	25	2.77	2.804	2.816	2.735	2.780	3.430	3.250	.485-.495	.170
APC – 300	3"	20	3.0	3.429	3.441	3.360	3.405	4.110	3.950	.610-.620	.170
APC – 400	4"	10	2.3	4.429	4.441	4.360	4.405	5.265	5.000	.740-.750	.170

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

A
P
C

L
O
C
K
N
U
T
S



APC Fittings

Metallic Threaded Bushings

Applications:


Zinc Die Cast bushings are installed at the end of rigid/IMC conduits or in connectors to prevent the damage on cable during installation.

Available in Sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4".

Construction:

Zinc die cast



ARTMARK Cat. No.	Size	Standard Ctn.	Weight per Ctn. (Lbs)	Outer Diameter A		Height B		Inner Diameter C	
				mm	in (")	mm	in (")	mm	in (")
ARTGB050	1/2"	1400	3	26.8	1.06	10.3	0.406	15.9	0.626
ARTGB075	3/4"	1000	2.64	32.2	1.28	10.4	0.409	20.6	0.811
ARTGB100	1"	500	2.15	39	1.54	12.6	0.496	26.55	1.045
ARTGB125	1-1/4"	300	2.07	47.9	1.89	13.6	0.535	35.9	1.413
ARTGB150	1-1/2"	200	2.14	54	2.13	15.5	0.61	40.8	1.606
ARTGB 200	2"	150	1.75	66.8	2.63	13	0.51	50.5	1.988
ARTGB250	2-1/2"	75	13.9	52.1	2.05	15.8	0.62	62.1	2.445
ARTGB300	3"	65	19.5	97	3.82	20.9	0.823	77.9	3.067
ARTGB400	4"	40	21.5	125.5	4.94	21.8	0.858	102.5	4.035

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

M
e
t
a
l
l
i
c

T
h
r
e
a
d
e
d

B
u
s
h
i
n
g
s



APC Fittings

Aluminum Weatherproof 1-Gang Boxes

Applications:

For use on outdoor/indoor applications and damp locations.

Include:

Mounting lugs, closure plugs, and grounding screw.

Available Colors: Gray (Stock), Bronze, White

Construction:

Die Cast Aluminum w/threaded holes For Indoor/Outdoor use



3-Holes



4-Holes



APC Weather proof boxes can be installed where UL listed product is required.

ARTMARK Cat. No.	Description	Standard Ctn.	Weight/ Ctn. Std. (Lbs.)	# of Holes	Hole Size	Color	Ctn. Size		
							Length	Width	Height
ART1GWPB050-3	1-Gang Box 2 $\frac{3}{4}$ " x 4 $\frac{1}{2}$ " x 2" For Indoor/Outdoor use	40	23	3	1 $\frac{1}{2}$ "	Gray	15.55"	10.24"	9.06"
ART1GWPB050-4	1-Gang Box 2 $\frac{3}{4}$ " x 4 $\frac{1}{2}$ " x 2" For Indoor/Outdoor use	40	25	4	1 $\frac{1}{2}$ "	Gray	15.55"	10.24"	9.06"
ART1GWPB075-3	1-Gang Box 2 $\frac{3}{4}$ " x 4 $\frac{1}{2}$ " x 2" For Indoor/Outdoor use	40	22	3	3 $\frac{1}{4}$ "	Gray	15.55"	10.24"	9.06"

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

W
e
a
t
h
e
r
p
r
o
o
f

B
o
x
e
s



Aluminum Weatherproof 2-Gang Boxes



Applications:

For use on outdoor/indoor applications and damp locations.

Include:

Mounting lugs, closure plugs, and grounding screw.

Available Colors: Gray (Stock), Bronze, White

Construction:

Die Cast Aluminum w/threaded holes For Indoor/Outdoor use



APC Weather proof boxes can be installed where UL listed product is required.

ARTMARK Cat. No.	Description	Standard Ctn.	Weight/ Ctn. Std. (Lbs.)	# of Holes	Hole Size	Color	Ctn. Size		
							Length	Width	Height
ART2GWPB050-3	2-Gang Box $4\frac{9}{16}$ " x $4\frac{1}{2}$ " x 2" For Indoor/Outdoor use	24	18	3	$\frac{1}{2}$ "	Gray	15.35"	10.04"	9.84"
ART2GWPB050-4	2-Gang Box $4\frac{9}{16}$ " x $4\frac{1}{2}$ " x 2" For Indoor/Outdoor use	24	20	4	$\frac{1}{2}$ "	Gray	15.35"	10.04"	9.84"
ART2GWPB050-5	2-Gang Box $4\frac{9}{16}$ " x $4\frac{1}{2}$ " x 2" For Indoor/Outdoor use	24	20	5	$\frac{1}{2}$ "	Gray	15.35"	10.04"	9.84"
ART2GWPB075-3	2-Gang Box $4\frac{9}{16}$ " x $4\frac{1}{2}$ " x 2" For Indoor/Outdoor use	24	19	3	$\frac{3}{4}$ "	Gray	15.35"	10.04"	9.84"

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



Aluminum Weatherproof Round Boxes

Applications:

For use on outdoor/indoor applications and damp locations.

Include:

Mounting lugs, closure plugs, and grounding screw.

Available Colors: Gray (Stock), Bronze, White

Construction:

Die Cast Aluminum w/threaded holes For Indoor/Outdoor use

APC Weather proof boxes can be installed where UL listed product is required.



5-Holes



ARTMARK Cat. No.	Description	Standard Ctn. 	Weight/ Ctn. Std. (Lbs.)	# of Holes	Hole Size	Color	Ctn. Size		
							Length	Width	Height
ARTRDWPB050-5	Round Outlet Box 4" For Indoor/Outdoor use	32	19	5	1/2"	Gray	15.55"	10.24"	9.06"
ARTRDWPB075-5	Round Outlet Box 4" For Indoor/Outdoor use	32	17	5	3/4"	Gray	15.55"	10.24"	9.06"



APC Fittings

Aluminum Weatherproof Covers

Applications:

For use on APC weatherproof boxes outdoor/indoor applications and damp locations.

Include:

Mounting Screws and gaskets.

Available Colors: Gray (Stock), Bronze, White

Construction:

Die Cast Aluminum for the ARTRC
Steel for blank covers



LISTED

E333220

E366090

E366091



ART1GBLNKCVRWP



ART2GBLNKCVRWP



ARTRDBLNKCVRWP



ARTRC1H



ARTRC2H



ARTRC3H

APC Weatherproof covers can be installed where UL listed product is required.

ARTMARK Cat. No.	Description	Standard Ctn.	Weight/ Ctn. Std. (Lbs.)	# of Threaded Holes	Hole Size	Color	Ctn. Size		
							Length	Width	Height
ART1GBLNKCVRWP	Rectangular Blank Cover 2 ¹³ / ₁₆ " x 4 ⁹ / ₁₆ "	100	17	No	-	Gray	15.35	7.48	7.48
ART2GBLNKCVRWP	Square Blank Cover 4 ⁹ / ₁₆ " x 4 ⁹ / ₁₆ "	50	15	No	-	Gray	10.63	8.66	5.51
ARTRDBLNKCVRWP	Round Blank Cover 4" x 4"	50	14	No	-	Gray	10.63	8.66	5.51
ARTRC1H	Round 1-Lamp Holder Cover 1/2" Threaded Hole	50	10	1	1/2"	Gray	14.96	10.43	7.09
ARTRC2H	Round 2-Lamp Holder Cover 1/2" Threaded Hole	50	11	2	1/2"	Gray	14.96	10.43	7.09
ARTRC3H	Round 3-Lamp Holder Cover 1/2" Threaded Hole	50	10	3	1/2"	Gray	14.96	10.43	7.09

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

W
e
a
t
h
e
r
p
r
o
o
f

C
o
v
e
r
s



APC Fittings

Aluminum Weatherproof Duplex Cover & Lampholder

Applications:

For use on APC weatherproof boxes outdoor/indoor applications and damp locations.

Include:

Mounting Screws and gaskets.

Available Colors: Gray (Stock), Bronze, White

Construction:

Die Cast Aluminum.



ART1GWPCDPLXHZ



ARTLH1PAR

APC weatherproof duplex cover & lamp holder can be installed where UL listed product is required.

ARTMARK Cat. No.	Description	Standard Ctn. 	Weight/ Ctn. Std. (Lbs.)	Color	Ctn. Size		
					Length	Width	Height
ART1GWPCDPLXHZ	1-Gang Horizontal Duplex Cover for Receptacles or Switches	50	10	Gris	15.55"	10.24"	9.06"
ARTLH1PAR	Lamp holder for 150W Max PAR38 120V	100	35	Gris	15.55"	10.24"	9.06"

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

W
e
a
t
h
e
r
p
r
o
o
f

P
r
o
d
u
c
t
s



LB Threaded Condulets

(Body-Cover & Gasket)

APC Fittings

Applications:


LB threaded conduit body are used to access cables, pull, inspect and provide maintenance on a wiring system where the channeling could change direction. It includes threaded hubs for use with IMC or rigid pipe or with EMT pipe with the use of an EMT connector.

Available Sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4"

Construction:

Body & cover are made of die cast aluminum copper free, light weight, and corrosion resistant.

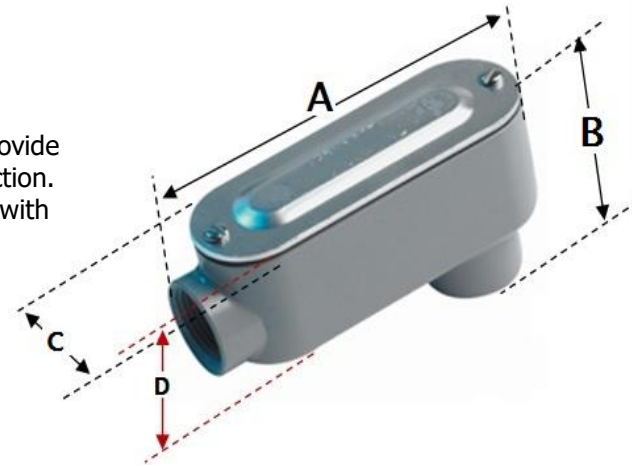

LISTED

E328240

APC Condulets can be installed where UL listed product is required.

LB Threaded Condulet

ARTMARK Cat. No.	Size		Standard Carton 	Weight/ Ctn. Std. (Lbs.)	Dimensions							
	in (")	mm			A		B		C		D	
					In (")	mm	In (")	mm	In (")	mm	In (")	mm
ARTLB050ACGUL	1/2"	12.7	50	16.2	4.36	110.7	2.15	54.6	1.35	34.3	1.37	34.8
ARTLB075ACGUL	3/4"	19.1	20	8.4	4.98	126.5	2.36	60	1.55	39.3	1.65	42
ARTLB100ACGUL	1"	25.4	50	29.6	5.81	147.5	2.68	68	1.76	44.6	1.89	48
ARTLB125ACGUL	1¼"	31.8	8	9.3	7.80	198.2	3.43	87	2.52	64.1	2.68	68
ARTLB150ACGUL	1½"	38.1	8	10.1	7.76	197.1	3.63	92.3	2.54	64.5	2.68	68
ARTLB200ACGUL	2"	50.8	4	9.1	9.84	250	4.33	110	3.15	80	3.43	87.1
ARTLB250ACGUL	2½"	63.5	1	4.8	12.60	320	5.20	132	4.50	114.3	3.98	101
ARTLB300ACGUL	3"	76.2	1	5.1	12.56	319	5.64	143.3	4.50	114.2	4.52	114.7
ARTLB400ACGUL	4"	101.6	1	7.1	15.55	395	6.73	171	5.59	142	5.57	141.5

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



LL Threaded Condulets

(Body-Cover & Gasket)

APC Fittings

Applications:


LL threaded conduit body are used to access cables, pull, inspect and provide maintenance on a wiring system where the channeling could change direction. It includes threaded hubs for use with IMC or rigid pipe or with EMT pipe with the use of an EMT connector.

Available Sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4"

Construction:

Body & cover are made of die cast aluminum copper free, light weight, and corrosion resistant.

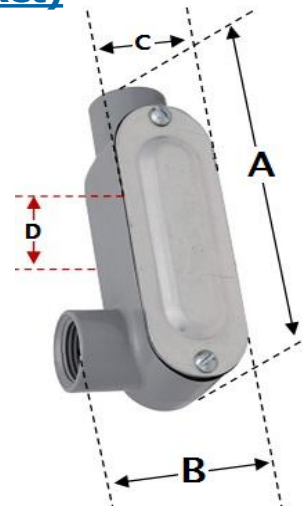

E328240

APC Condulets can be installed where UL listed product is required.

ARTMARK Cat. No.	Size		Standard Carton 	Weight/ Ctn. Std. (Lbs.)	Dimensions							
	in (“)	mm			A		B		C		D	
					In (“)	mm	In (“)	mm	In (“)	mm	In (“)	mm
ARTLL050ACGUL	1/2“	12.7	50	15.1	4.37	111	2.11	53.6	1.35	34.3	1.37	34.8
ARTLL075ACGUL	3/4”	19.1	20	9.1	5.10	129.5	2.32	59	1.55	39.3	1.65	42
ARTLL100ACGUL	1“	25.4	50	29.5	5.91	150	2.40	61	1.76	44.6	1.89	48
ARTLL125ACGUL	1¼“	31.8	8	9.7	7.76	197.1	3.39	86.1	2.52	64.1	2.68	68
ARTLL150ACGUL	1½“	38.1	8	9.6	7.85	199.5	3.39	86.1	2.54	64.5	2.68	68
ARTLL200ACGUL	2“	50.8	4	8.3	9.88	251	4.09	104	3.15	80	3.43	87.1
ARTLL250ACGUL	2½“	63.5	1	4.1	12.60	320	5.83	148.1	4.50	114.3	3.98	101
ARTLL300ACGUL	3“	76.2	1	4.2	12.60	320	5.83	148	4.50	114.2	4.52	114.7
ARTLL400ACGUL	4“	101.6	1	7.4	15.63	397	7.60	193	5.59	142	5.57	141.5

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>

LL Threaded Condulet



LR Threaded Condulets

(Body-Cover & Gasket)

APC Fittings

Applications:


LR threaded conduit body are used to access cables, pull, inspect and provide maintenance on a wiring system where the channeling could change direction. It includes threaded hubs for use with IMC or rigid pipe or with EMT pipe with the use of an EMT connector.

Available Sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4"

Construction:

Body & cover are made of die cast aluminum copper free, light weight, and corrosion resistant.

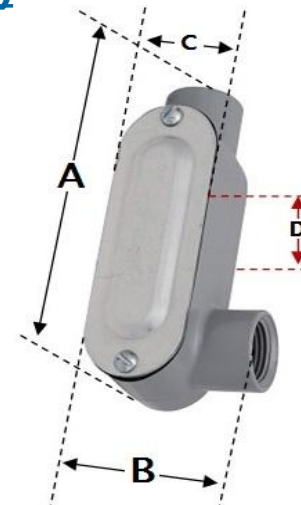

LISTED
E328240

APC Condulets can be installed where UL listed product is required.

LR Threaded Condulet

ARTMARK Cat. No.	Size		Standard Carton 	Weight/ Ctn. Std. (Lbs.)	Dimensions							
	in (")	mm			A		B		C		D	
					In (")	mm	In (")	mm	In (")	mm	In (")	mm
ARTLR050ACGUL	1/2"	12.7	50	15.1	4.37	111	2.11	53.5	1.35	34.3	1.37	34.7
ARTLR075ACGUL	3/4"	19.1	20	9.5	5.06	128.5	2.29	58.1	1.55	39.3	1.63	41.5
ARTLR100ACGUL	1"	25.4	50	30.1	5.79	147	2.43	61.6	1.76	44.6	1.89	48
ARTLR125ACGUL	1¼"	31.8	8	9.9	7.76	197	3.39	86	2.52	64.1	2.68	68
ARTLR150ACGUL	1½"	38.1	8	9.4	7.83	199	3.41	86.5	2.54	64.5	2.69	68.2
ARTLR200ACGUL	2"	50.8	4	8.4	9.88	251	4.07	103.5	3.15	80	3.44	87.4
ARTLR250ACGUL	2½"	63.5	1	4.4	12.64	321	5.85	148.5	4.50	114.3	3.98	101
ARTLR300ACGUL	3"	76.2	1	4.5	12.60	320	5.85	148.5	4.50	114.2	4.43	112.5
ARTLR400ACGUL	4"	101.6	1	7.4	15.63	397	7.60	193	5.59	142	5.57	141.5

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



T Threaded Condulets

(Body-Cover & Gasket)



APC Fittings

Applications:


"T" threaded condulet body are used to access cables, pull, inspect and provide maintenance on a wiring system where the channeling could change direction. It includes threaded hubs for use with IMC or rigid pipe or with EMT pipe with the use of an EMT connector.

Available Sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" & 4"

Construction:

Body & cover are made of die cast aluminum copper free, light weight, and corrosion resistant.

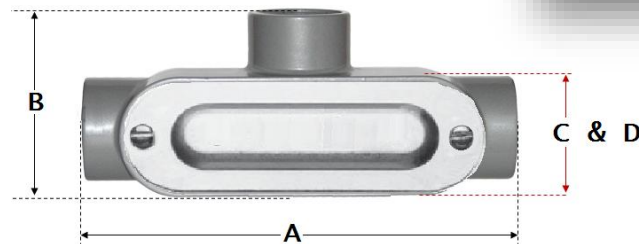

LISTED

E328240

APC Condulets can be installed where UL listed product is required.

T
T
h
r
e
a
d
e
d

C
o
n
d
u
l
e
t

ARTMARK Cat. No.	Size		Standard Carton 	Weight/ Ctn. Std. (Lbs.)	Dimensions							
	in (")	mm			A		B		C		D	
					In (")	mm	In (")	mm	In (")	mm	In (")	mm
ARTT050ACGUL	1/2"	12.7	40	16.2	4.83	122.6	2.09	53	1.42	36	1.42	36
ARTT075ACGUL	3/4"	19.1	20	10.9	5.40	137.2	2.24	57	1.64	41.7	1.64	41.7
ARTT100ACGUL	1"	25.4	50	31.2	6.20	157.6	2.54	64.5	1.90	48.2	1.90	48.2
ARTT125ACGUL	1¼"	31.8	10	11.1	8.23	209	3.42	86.8	2.65	67.3	2.65	67.3
ARTT150ACGUL	1½"	38.1	10	9.8	8.23	209	3.46	88	2.72	69	2.72	69
ARTT200ACGUL	2"	50.8	4	7.9	10.20	259	4.07	103.3	3.43	87	3.43	87
ARTT250ACGUL	2½"	63.5	1	4.7	13.07	332	5.85	148.5	3.98	101	3.98	101
ARTT300ACGUL	3"	76.2	1	4.3	13.07	332	5.85	148.5	4.49	114.1	4.49	114.1
ARTT400ACGUL	4"	101.6	1	7.6	16.22	412	7.60	193	5.53	140.5	5.53	140.5

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Fittings

Entrance Head Clamp Type

Applications:


Accessory used as a connection point in an air system to allow cable entry into the main panel. Clamp type entrance head can be installed on EMT, IMC or rigid conduit.

Available sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" y 4".

Construction:

Corrosion resistant aluminum

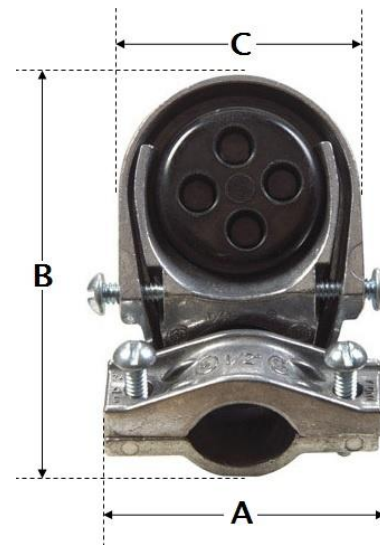

Entrance Head Clamp

ARTMARK Cat. No.	Size		Standard Carton	Weight/ Ctn. Std. (Lbs.)	Dimensions					
	in (″)	mm			A		B		C	
					In (″)	mm	In (″)	mm	In (″)	mm
ARTEHCO050UL	1/2″	12.7	120	33.6	2.64	67.1	3.28	83.3	2.00	50.7
ARTEHCO075UL	3/4″	19.1	80	25.6	2.49	63.3	3.61	91.8	2.24	57
ARTEHCO100UL	1″	25.4	40	16	2.74	69.7	4.07	103.3	2.52	64.1
ARTEHCO125UL	1¼″	31.8	32	17.9	3.09	78.5	4.71	119.6	2.97	75.4
ARTEHCO150UL	1½″	38.1	16	12.8	3.66	93	5.98	152	3.46	87.8
ARTEHCO200UL	2″	50.8	8	11.2	4.31	109.4	7.64	194	4.54	115.4
ARTEHCO250UL	2½″	63.5	1	3.7	6.54	166	10.67	271	6.14	156
ARTEHCO300UL	3″	76.2	1	4.2	6.87	174.6	10.91	277	6.19	157.2
ARTEHCO400UL	4″	101.6	1	6.7	7.83	199	12.91	328	7.89	200.5

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Fittings

Entrance Head Threaded Type



Applications:


Accessory used as a connection point in an air system to allow cable entry into the main panel. Clamp type entrance head can be installed on IMC or rigid conduit only.

Available sizes:

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3" y 4".

Construction:

Corrosion resistant aluminum

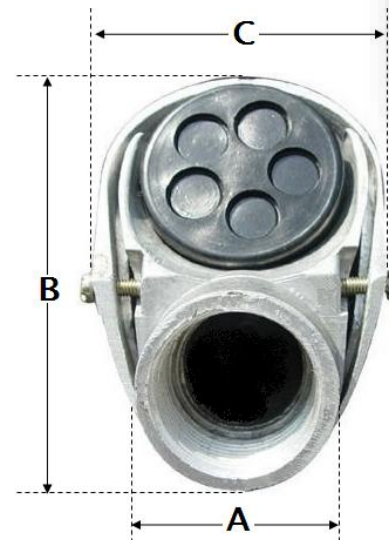

LISTED

E475286

Entrance Head Threaded

ARTMARK Cat. No.	Size		Standard Carton	Weight/ Ctn. Std. (Lbs.)	Dimensions					
	in (")	mm			A		B		C	
					In (")	mm	In (")	mm	In (")	mm
ARTEHTT050UL	1/2"	12.7	120	34.8	1.043	26.5	3.011	76.5	1.98	50.3
ARTEHTT075UL	3/4"	19.1	80	28	1.169	29.7	3.295	83.7	2.216	56.3
ARTEHTT100UL	1"	25.4	40	19.2	1.511	38.4	3.85	97.8	2.5	63.5
ARTEHTT125UL	1¼"	31.8	32	16.6	1.889	48	4.507	114.5	2.933	74.5
ARTEHTT150UL	1½"	38.1	16	14.7	2.165	55	5.708	145	3.433	87.2
ARTEHTT200UL	2"	50.8	8	12.3	2.657	67.5	7.267	184.6	4.539	115.3
ARTEHTT250UL	2½"	63.5	1	7.3	3.307	84	10.511	267	6.169	156.7
ARTEHTT300UL	3"	76.2	1	8.1	3.98	101.1	10.984	279	6.248	158.7
ARTEHTT400UL	4"	101.6	1	13.9	5.129	130.3	12.381	314.5	8.07	205

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Products

Artmark Pipe & Conduit

EMT Conduit & Elbows



Specifications:

APC EMT pipe is manufactured in accordance with the latest edition of the following standards:

- American National Standard for rigid steel EMT (ANSI C80.3 ®).
- Underwriters Laboratories Standard for EMT-Steel (UL797).
- ® 2002 National Electrical Code Article 358 (1999 NEC ® Article 348).

Available sizes: ½", ¾", 1", 1¼", 1½", 2", 2½", 3", 4".
10' standard (3.05 m)



Rigid Conduit & Elbows



Specifications:

APC RIGID pipe is manufactured in accordance with the latest edition of the following standards:

- American National Standards Institute (ANSI®).
- American National Standard for Rigid Steel Tubing (ANSI® C80.1).
- Underwriters Laboratories Standard for Rigid Steel Tubing (UL6).
- National Electric Code® 2002 Article 344 (1999 NEC Article 346).



Available sizes: ½", ¾", 1", 1¼", 1½", 2", 2½", 3", 4", 5" y 6".
10' standard (3.05 m)



APC EMT Conduit



Size		Standard Lift	Weight per lift		Nominal Weight 100Ft (30.5M)		Nominal O.D.		Wall Thickness	
U.S. (In)	Metric (mm)	Ft.	Lbs	Kg	Lbs	Kg	In	mm	In	mm
1/2	16	7000	2083	945	30	13.5	0.706	17.93	0.042	1.07
3/4	21	5000	2282	1305	46	20.7	0.922	23.42	0.049	1.24
1	27	3000	2024	918	67	30.6	1.163	29.54	0.057	1.45
1-1/4	35	2000	2011	912	101	45.6	1.510	38.35	0.065	1.65
1-1/2	41	1500	1746	792	116	52.8	1.740	44.20	0.065	1.65
2	53	1200	1777	806	148	67.2	2.197	55.80	0.065	1.65
2-1/2	63	610	1316	597	216	97.9	2.875	73.03	0.072	1.83
3	78	510	1349	612	265	120.0	3.500	88.90	0.072	1.83
3-1/2	91	370	1290	585	348	158.0	4.000	101.60	0.083	2.11
4	103	300	1177	534	392	178.0	4.500	114.30	0.083	2.11

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



APC Rigid Conduit



Size		Standard Lift	Weight per lift		Nominal Weight 100Ft (30.5M)		Nominal O.D.		Wall Thickness	
U.S. (In)	Metric (mm)	Ft.	Lbs	Kg	Lbs	Kg	In	mm	In	mm
1/2	16	2500	2050	930	82	37.2	0.840	21.3	0.104	2.60
3/4	21	2000	2178	988	109	49.4	1.050	26.7	0.107	2.70
1	27	1250	2013	913	161	73.0	1.315	33.4	0.126	3.20
1-1/4	35	900	1962	890	218	98.9	1.660	42.2	0.133	3.40
1-1/2	41	800	2099	952	263	119	1.900	48.3	0.138	3.50
2	53	600	2103	954	350	159	2.375	60.3	0.146	3.70
2-1/2	63	370	2072	940	559	254	2.875	73.0	0.193	4.90
3	78	300	2183	990	727	330	3.500	88.9	0.205	5.20
3-1/2	91	250	2200	998	880	399	4.000	101.6	0.215	5.50
4	103	200	2059	934	1030	467	4.500	114.3	0.225	5.70
5	129	150	2101	953	1400	635	5.563	141.3	0.245	6.20
6	155	100	1841	835	1840	835	6.625	168.3	0.266	6.80

11315 NW 36 TER Miami, FL 33178 Tel: (305) 715-9800 Fax: (305) 715-9988

<http://www.artmark.com>



Artmark Pipe & Conduit

Specifications:

Our elbows are made of EMT conduit according to the latest specifications and standards of ANSI C80.3 (UL797).

The interior and exterior surface of elbows are free from defection with a smooth welded seam, and also are thoroughly and evenly coated with zinc using hot dip galvanizing process, so that metal-to-metal contact and galvanic protection against corrosion are provided, and surface of elbows with a clear post-galvanizing coating to provide further protection against corrosion.



APC EMT elbow is manufactured in accordance with the latest edition of the following standards:
American National Standard for rigid steel EMT (ANSI C80.3 ®).
Underwriters Laboratories Standard for EMT-Steel (UL797).



EMT Elbows 90°

Applications:

EMT elbows are used on conduit raceway installation to change the direction to an specific angle by joining conduit to elbows. EMT couplings (set-screws or compression) are used for this join.

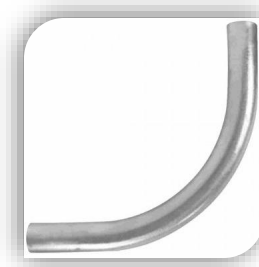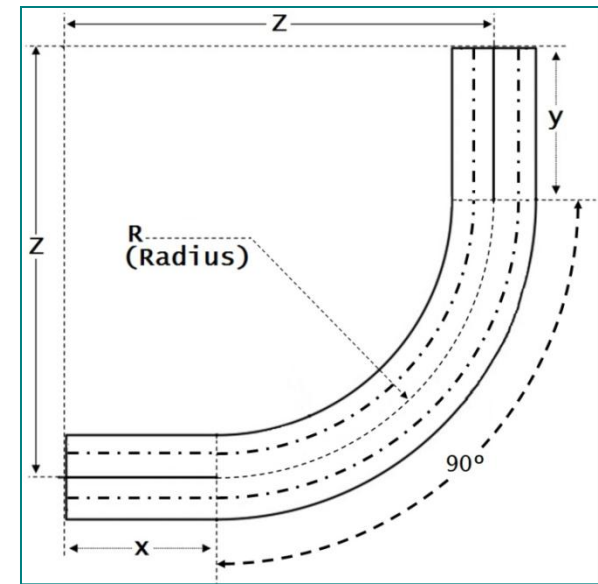

Available sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3", 4".

Available angles (<) 90° (Std), 60°, 45°, 30°, 22.5° & 15° upon request.

Size		Standard Carton Qty.	Weight per box		Dimensions (Z)		Minimum UM standard radius		Straight length (x, y)	
U.S. (In)	Metric (mm)		Lbs	Kg	In	mm	In	mm	In	mm
1/2	16	50	11.92	5.42	5.71	145	4.02	102	1.69	43
3/4	21	50	21.65	9.84	6.65	169	4.49	114	2.17	55
1	27	20	15.44	7.02	8.11	206	5.75	146	2.36	60
1-1/4	35	20	28.29	12.86	10	254	7.24	184	2.76	70
1-1/2	41	10	18.66	8.48	11.4	290	8.27	210	3.15	80
2	53	10	27.15	12.34	13.03	331	9.49	241	3.54	90
2-1/2	63	50	233.02	105.92	15.24	387	10.51	267	4.72	120
3	78	35	239.34	108.79	18.3	465	12.99	330	5.31	135
3-1/2	91	35	362.98	164.99	21.1	536	15.00	381	6.10	155
4	103	25	311.34	141.52	22.5	571	15.98	406	6.50	165



Artmark Pipe & Conduit


Specifications:

Our elbows are made of high strength steel. The interior and exterior surface of elbows are free from defects with a smooth welded seam, are thoroughly and evenly coated with zinc using hot dip galvanizing process, so that metal-to-metal contact and galvanic protection against corrosion are provided, and surface of elbows with a clear post-galvanizing coating to provide further protection against corrosion

APC rigid elbows are manufactured in accordance with the latest edition of the following standards:
 American National Standards Institute (ANSI®).
 American National Standard for Rigid Steel Tubing (ANSI® C80.1).
 Underwriters Laboratories Standard for Rigid Steel Tubing (UL6).
 National Electric Code® 2002 Article 344 (1999 NEC Article 346)




RIGID Elbow 90°

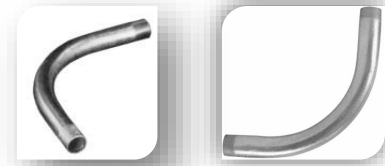

Applications:

Rigid elbows are used on conduit raceway installation to change the direction to an specific angle by joining conduit to elbows. Rigid couplings are used for this join.

Available sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3", 4", 5", 6".
 Available angles (<) 90° (Std), 60°, 45°, 30°, 22.5° & 15° upon request.

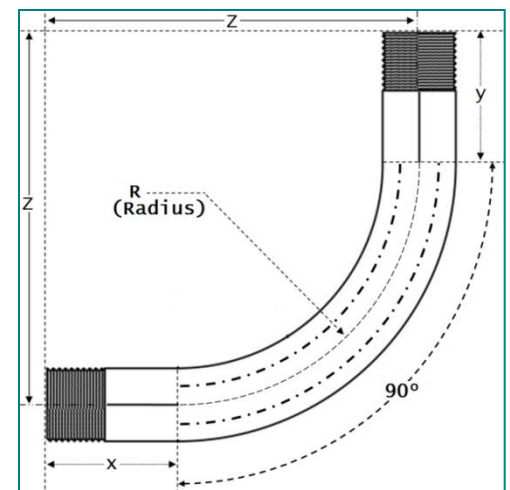

Size		Standard Carton Qty. 	Weight per box		Dimensions (Z)		Minimum UM standard radius		Straight length (x, y)	
U.S. (In)	Metric (mm)		Lbs	Kg	In	mm	In	mm	In	mm
1/2	16	50	33	15	5.7	145	4.0	102	1.7	43
3/4	21	50	51.9	23.6	6.7	169	4.5	114	2.2	55
1	27	20	37.0	16.8	8.1	206	5.7	146	2.4	60
1-1/4	35	20	60.9	27.7	10.0	254	7.2	184	2.8	70
1-1/2	41	10	42	19.1	11.4	290	8.3	210	3.1	80
2	53	10	64	29.1	13.0	331	9.5	241	3.5	90
2-1/2	63	50	606.1	275.5	15.2	387	10.5	267	4.7	120
3	78	35	660	300	18.3	465	13.0	330	5.3	135
3-1/2	91	35	918.9	417.7	21.1	536	15.0	381	6.1	155
4	103	25	819.1	372.3	22.5	571	16.0	406	6.5	165
5	129	Bulk	69.5	31.6	35.2	893	24.0	610	11.1	283
6	152.4	Bulk	119.6	54.4	43.3	1099	30.0	762	13.3	337